



MADE IN ITALY since 1972

SNAKE 27 MINI SNAKE 27


FEATURES

- # CB Mobile antenna
- # Tunable by acting on the metallic rings
- # SNAKE: 17/7 PH tapered black chromed stainless steel whip
- # MINI SNAKE: 17/7 PH cylindrical black chromed stainless steel whip
- # 180° adjustable whip
- # M6 radiators: bottom joint M6 female
- # Detachable for car-wash
- # Suitable for magnetic mount


TECHNICAL DATA

Type: base loaded
 Impedance: 50 Ω
 Frequency range: 26.5 27.4 MHz tunable
 Polarization: linear vertical
 SWR @ res. freq.: ≤ 1.2
 Max. power: 10 Watts (CW) continuous
 40 Watts (CW) short time
 Bandwidth @ SWR ≤ 2:
 SNAKE 27, SNAKE 27 M6: ≥ 1800 kHz (160 channel)
 MINI SNAKE 27, MINI SNAKE M6 ≥ 1000 kHz (90 channel)
 Height (approx.):
 SNAKE 27: 1125 mm, 3.7 ft
 MINI SNAKE 27: 650 mm, 2.1 ft
 Weight (approx.): 350 gr, 0.8 lb
 Mount type:
 SNAKE 27, MINI SNAKE 27: "N" mount, hole Ø12.5 mm, 1/2 in
 SNAKE 27 M6, MINI SNAKE 27 M6: M6 thread joint
 MINI SNAKE 27 MAG: PM-100 S magnetic mount
 Cable length / type:
 SNAKE 27, MINI SNAKE 27: 4m, 13 ft / RG58
 SNAKE 27 M6, MINI SNAKE 27 M6: not supplied
 MINI SNAKE 27 MAG: 3.6m, 11.8 ft / RG58



- P/N 2204306.01 SNAKE 27
- P/N 2404306.06 SNAKE 27 M6 (whip only)
- P/N 2204406.01 MINI SNAKE 27
- P/N 2404406.06 MINI SNAKE 27 M6 (whip only)
- P/N 2204406.61 MINI SNAKE 27 MAG

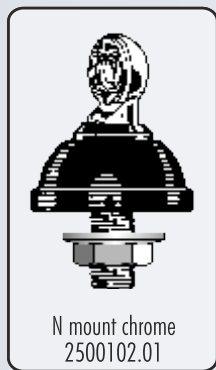

STANDARD MOUNT

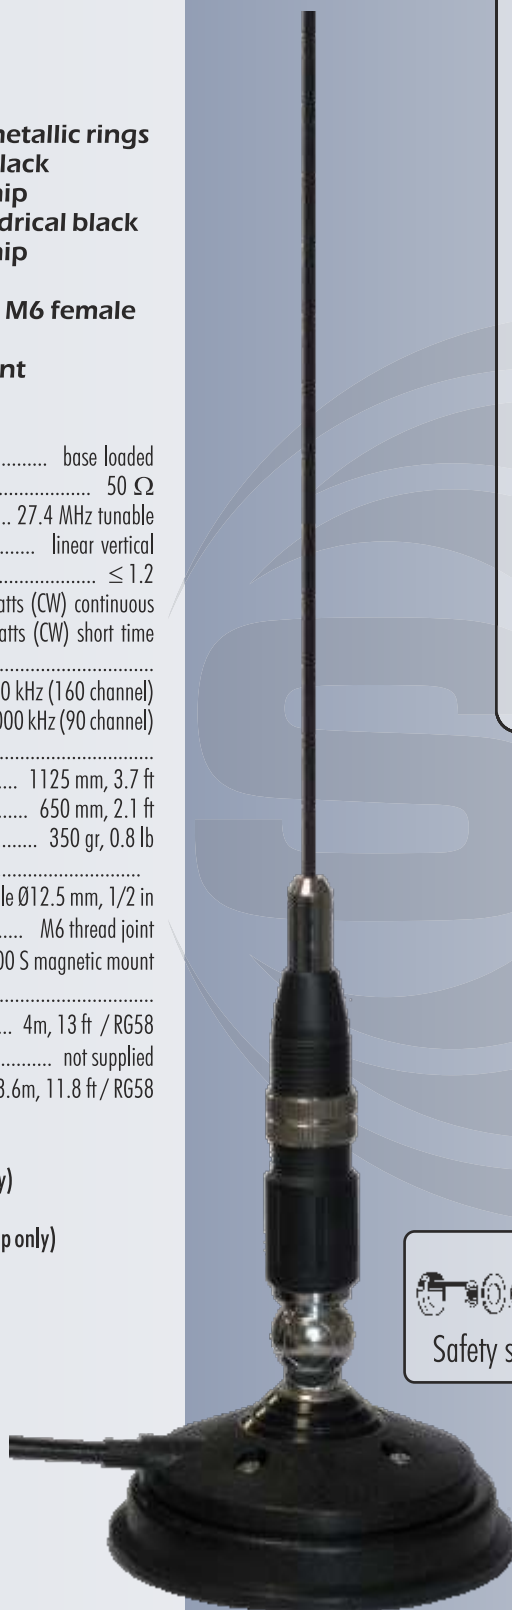

MINI SNAKE 27 MAG

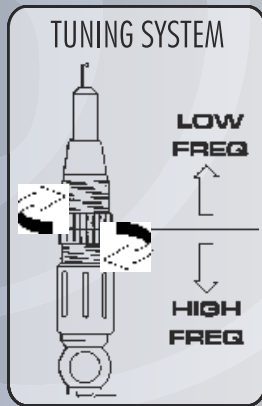

SNAKE 27
MINI SNAKE 27