



MADE IN ITALY since 1972

SG-CB 1000 & 1400 GL 27

SG-CB 1000, SG-CB 1400

- # CB & 10m Mobile antennas
- # Tunable from 27 to 28.5 MHz
- # 90° tiltable whip
- # Detachable for car-wash installation

TECHNICAL DATA

Type: central loaded
 Impedance: 50 W
 Frequency range: 27 ... 28.5 MHz
 Polarization: linear vertical
 SWR @ res. freq.: \leq 1.2
 Max. power:
 SG-CB 1000 60 Watts (CW) continuous
 180 Watts (CW) short time
 SG-CB 1400 120 Watts (CW) continuous
 360 Watts (CW) short time
 Bandwidth @ SWR \leq 2:
 SG-CB 1000 \pm 550 kHz (50 channel)
 SG-CB 1400 \pm 1100 kHz (100 channel)
 Height (approx.):
 SG-CB 1000 1000 mm, 3.3 ft
 SG-CB 1400 1400 mm, 4.6 ft
 Weight (approx.): 320 gr, 0.7 lb
 Standard connector: UHF PL-259
 Cable: not supplied

P/N 2211305.05 SG-CB 1000

P/N 2211405.05 SG-CB 1400


GL 27 Ground Less

- # CB & 10m Mobile antenna
- # Particularily suitable for all vehicles with non-metallic body
- # DC-Ground protection
- # 180° adjustable whip

TECHNICAL DATA

Type: base loaded
 Impedance: 50 W
 Center Frequency: 27.185 MHz
 Radiation: omnidirectional
 Polarization: linear vertical
 SWR @ res. freq.: \leq 1.2
 Max. power: 15Watts (CW) continuous, 50Watts (CW) short time
 Bandwidth @ SWR \leq 2: \pm 5500 kHz (500 channel)
 Height (approx.): 1140 mm, 3.7 ft
 Weight (approx.): 430 gr, 1 lb
 Cable Length / Type / Connector: 4m, 13 ft / RG 58 / UHF PL-259

P/N 2211724.76 GL 27 Ground Less

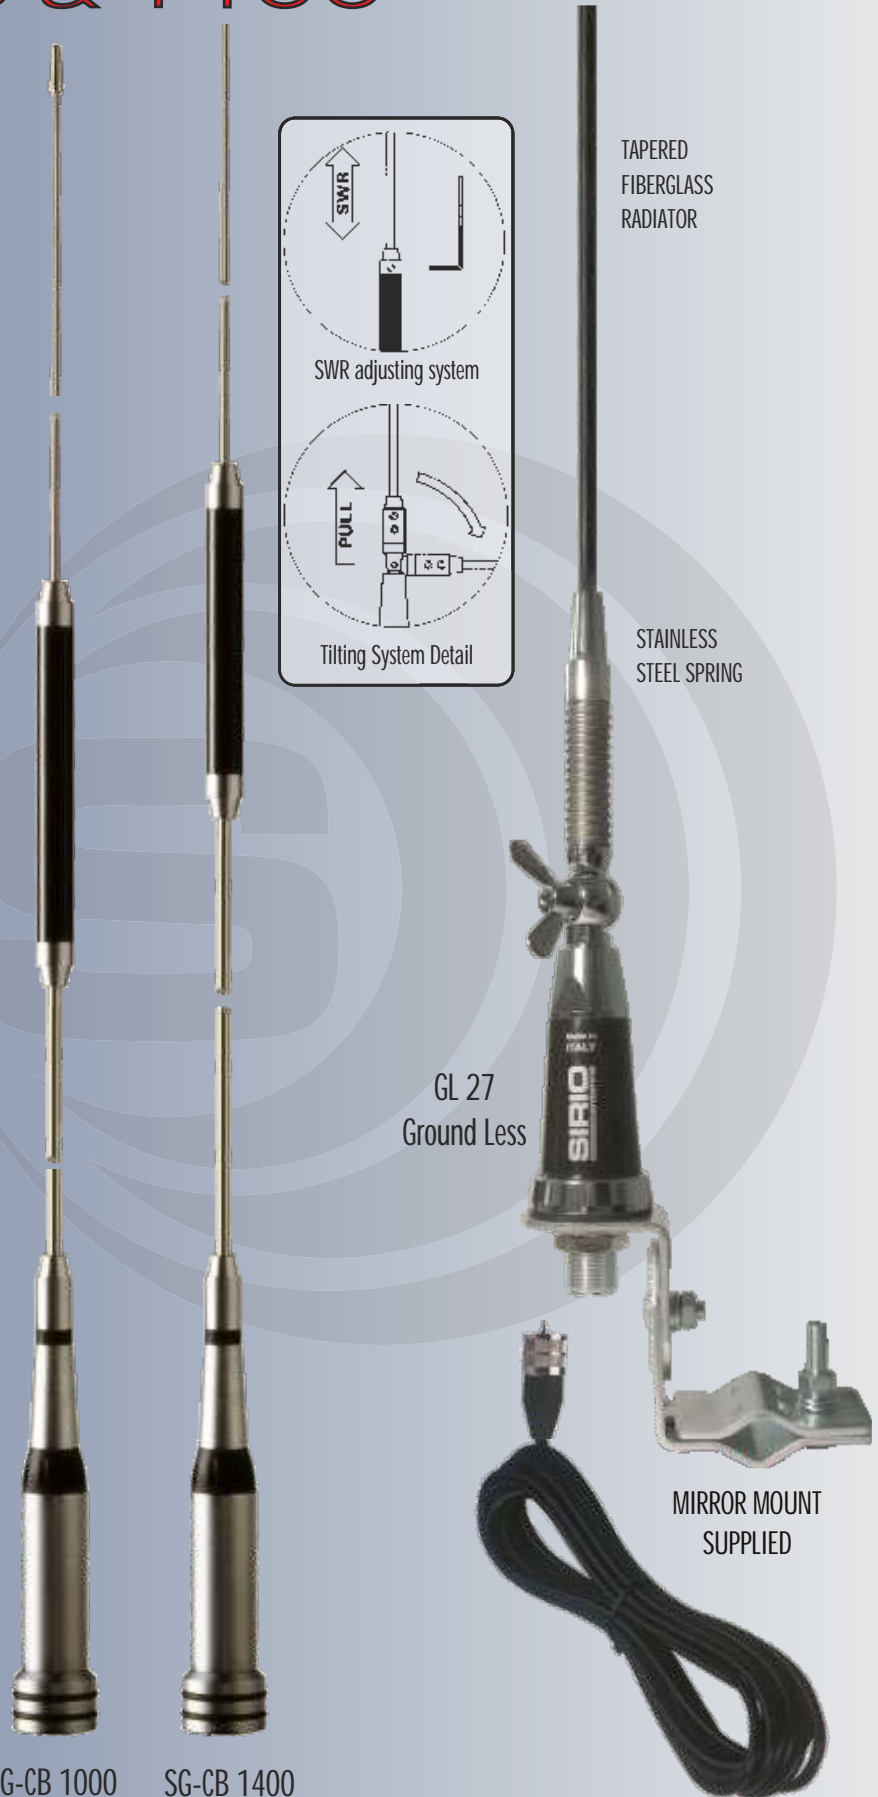

SG-CB 1000

SG-CB 1400